




Air Gap Transducer

AGT-212

FEATURES

- Air gap monitoring between 2 to 12 (0.08" to 0.47")
- Detachable sensor via $\varnothing 5\text{mm}$ coaxial connector for routing through ventilation holes
- DSP based linearization allowing greater accuracy and stability
- Active temperature compensation
- Resistant to strong magnetic field

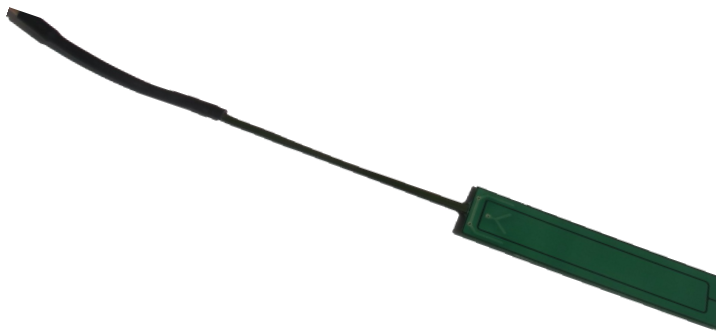

Monitoring solution



Air gap monitoring

Typical applications



Hydrogenerators



Windturbines



Gearless millsdrives

DESCRIPTION

Non-contact capacitive Air Gap Transmitter (AGT) for the measurement of the distance between its underlying surface and a metallic target. Each transmitter consists of a Sensor (AGS), an Air Gap Adapter (AGA) and a Conditioner (AGC).

Conditioner

The conditioner provides three signal outputs :

- MinGap¹ voltage (V)
- Pole Profile voltage (V)
- Pole Profile or MinGap¹ current (mA)

All outputs are galvanically isolated and the current output is factory set on Pole Profile. The digital technology combined with active temperature compensation allow linearization adjusted with great accuracy and resolution, with stable and repetitive behaviours. Industrial metal housing enables installation in harsh environments.

Sensor and Adapter

Designed for long life cycles, harsh environments and strong magnetic fields. The sensor shape is suitable for its installation on the stator wall of generators and motors. The sensor is connected to the air gap adapter via a flexible cable and a connector allowing routing through ventilation holes. This cable is protected on its entire length by flexible polyamide tubes. The air gap adapter is connected to the conditioner via a flexible cable and a 4 poles connector. This cable is protected on its entire length by a flexible metal conduit.

¹See user manual for detailed description

GLOBAL SPECIFICATIONS

OPERATION

Outputs	Voltage Pole Profile	Current - Pole profile or MinGap	Voltage MinGap
Value	2 to 10V	4 to 20mA	2 to 10V
Sensitivity to distance	0.8V/mm	1.6mA/mm	0.8V/mm
Loop resistance (current output)	n/a	Max. 500Ω	n/a
Output resistance (voltage outputs)	100Ω ±1%	n/a	100Ω ±1%
Linearity	< 5% of full scale ; < 2% from 3 to 8mm		
Temperature coefficient	< 300ppm/°C at 7mm		
Typical frequency response (-3dB)	DC to 1kHz		
Output noise	< 50mVrms		
Interchangeability tolerance	< 5% of full scale		
Linear measuring range	2 to 12mm (0.08 to 0.47 in.)		
Power			
Voltage	+24VDC nominal ±10% / Warm up time 10 minutes		
Current consumption	125mA typical		

ENVIRONMENTAL

Temperature range - part :	Sensor	Conditioner	Adapter
Operation	-15° to +125°C	-15° to +85°C	-15° to +85°C
Non-destructive	-40° to +150°C	-20° to +100°C	-20° to +100°C
Humidity (non-condensing)	resistant to 95% RH		
Shock	IEC 68 2.27 standard, 15g peak, 11ms		
Vibration	IEC 68 2.27 standard 5g peak, 10Hz to 150Hz		
EMC	EN 61326-2-3 / Sensor withstands 1.5 Tesla in a 50 or 60Hz magnetic field		
Fluid compatibility	withstands contact with water, oil, solvents, acids without degradation of material		
Conditioner case protection class	IP66, EN60529		


PHYSICAL [mm]

Sensor surface	70 x 17.5 x 0.8 LxWxH with 80mm of flex part
Adapter module dimensions	120 L x ø25
Conditioner module dimensions	170 x 63 x 40 LxWxH

ORDERING INFORMATION

Part type	Sensor	
Ordering code	04.212.100 M4	
Description	Triaxial cable of approx. 1.5m terminated by a $\varnothing 5\text{mm}$ coaxial connector to plug to adapter module. Delivered with polyamide flexible conduit.	
Part type	Conditioner	
Ordering code	04.212.200 M4	04.212.200 M5
Description	Aluminium case AISi12 with 3 mm mounting plate, stuffing gland and 4 poles input connector socket. Silver painted, colour RAL 7001. Special range 2 to 8mm (0.08 to 0.31 in.).	
Part type	Adapter	
Ordering code	04.212.300 M4	04.212.300 M5
Description	Sensor input via coaxial connector and output via shielded three core cable of 8 m terminated with 4 pole connector $\varnothing 11.5\text{mm}$. Delivered with 8 meters metal flexible conduit.	

TRANSDUCER OVERVIEW

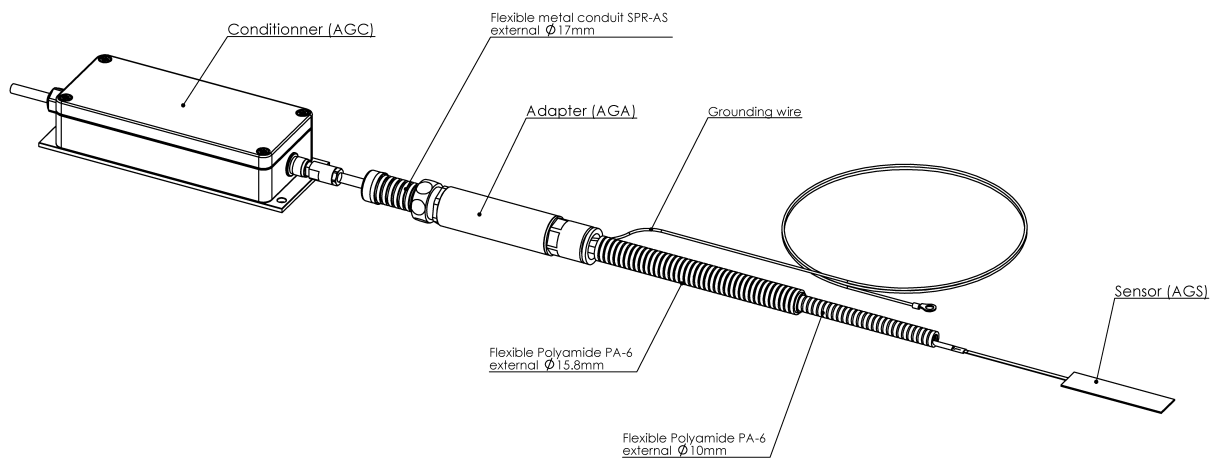

Conditionner must be grounded! See user manual for installation details

Due to the continual development of our products we reserve the right to modify the specifications without notification

MC-monitoring Quality certifications



LOCAL REPRESENTATIVE

MC-monitoring SA
 Route André Piller 19 | PO BOX 97
 CH-1762 Givisiez | Switzerland
 Phone : +41 58 411 54 00
 Fax : +41 58 411 54 10
 Mail : info@mc-monitoring.com
sales@mc-monitoring.com
 Web : mc-monitoring.com